


Pressalit 3 with soft close, incl. D38 uniflex hinge
 Pressalit 3 with soft close and lift-off, incl. D77 uniflex hinge
 Pressalit 3, incl. D38 uniflex hinge

No. 684xxx-D38999 with cover
 No. 684xxx-D77999 with cover
 No. 708xxx-D38999 with cover



Design/Year	Pressalit, 2009
Product Description	<p>PRESSALIT toilet seat with cover, model "Pressalit 3", art. no. 684/708 made of colour ingrained duroplast with stainless steel hinges</p> <ul style="list-style-type: none"> - with D38/D77 uniflex hinge of stainless steel - centre distance: 270 - 320 mm - load - ring seat 240 kg - suitable for Philippe Starck 3 (Duravit) - 10 year guarantee
Colour Programme xxx	000 white, 001 black, 273 pergamon
Hinge Finish	999 Stainless steel
Spare Parts	<p>A4001 Buffer for seat A4003 Buffer for cover</p>

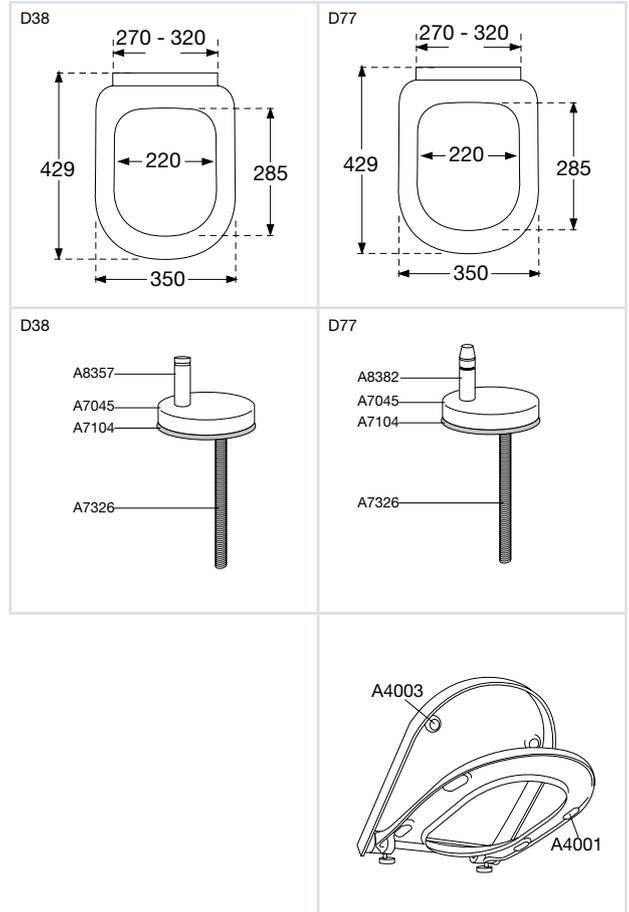

With Pressalit 3 we grant our customers the opportunity to elegantly combine quality, design and functionality. Pressalit 3 suits the Philippe Starck 3 series from Duravit very well. The seat has a discrete, stylish and minimalistic design that perfectly complements the clean lines of the Starck 3 bowl.

Pressalit 3 with soft close,incl. D38 uniflex hinge
Pressalit 3 with soft close and lift-off,incl. D77 uniflex hinge
Pressalit 3, incl. D38 uniflex hinge

No. 684xxx-D38999 with cover
No. 684xxx-D77999 with cover
No. 708xxx-D38999 with cover

Product Weight

Net weight approx. 2,800 kg, incl. hinge

Packaging

Single carton
5 single cartons in a master carton
12 master cartons (60) per pallet

Dimensions:

449x381x64 mm
456x388x340 mm

Weight:

3,200 kg
17,300 kg

Material Description

Toilet seat:

The material is colour ingrained duroplast (UF A 10 = urea formaldehyde) that contains no environmentally hazardous substances. UF plastic comprises 67% urea formaldehyde resin, 28% cellulose, as well as 5% minerals, pigments, lubricants and moisture content. The raw material from the supplier contains up to 0.03% free formaldehyde and even less following curing.

Buffers:

EVA (copolymer made of ethylene and vinyl acetate).

Damper kit:

Hydraulic damper with plastic casing and metal shaft.
Damper liquid: Silicone oil.

Mount/hinges:

Stainless steel (V2A) model W. no. 1.4301/M in accordance with DIN 17441/85.
Composition: Chrome (cr) 17-19%, nickel (ni) 8-11%, carbon <0.05%, molybdenum, silicone, sulphur, titanium.

Konsol:

Acid proof steel type EN 1.4404/A1S1 316L
Composition: Chrome (cr) 16,5-18,5%, nikkel (ni) 10-13%, molybdenum 2-2,5% , mangan, silicium, sulphur, titanium.

Suitability List

Usable on Philippe Starck 3 (Duravit).

Cleaning Instructions

Use a mild soap solution to clean the seat. Please take care that the seat and hinges are not left damp. Dry off any residual water or cleaning agent with a soft cloth. Avoid contact of the seat and hinges with abrasive, corrosive or chlorine-based cleaners, as these may cause damage or lead to flash rust. Therefore, when cleaning the bowl, make sure that the seat and cover are kept in an upright position until all cleaning agent has been flushed away.

The guarantee includes faults or defects in the material of our products within a period of 10 years.
Products subject to minor technical modifications and design deviations E. & O.E.



Pressalit A/S, Denmark



www.pressalit.com

European Sales Agencies
Leith House, 39 Campion Drive
Tanfield Lea, Stanley
Co Durham, DH9 9PQ, United Kingdom
T: +44 1207 236622
F: +44 1207 236633
info@europeansalesagencies.com
www.europeansalesagencies.com

Pressalit A/S
Pressalitvej 1
8680 Ry, Denmark
T: +45 8788 8788
F: +45 8788 8789
pressalit@pressalit.com
www.pressalit.com

PRESSALIT®
seats